ENCLOSURE SOLUTIONS GROUP (ESG)

RMC-4C

Rackmount Chassis

Applications
Internet Server (Web / Mail)
File Server
NAS / iSCSI
Military Application
Industrial / Telecom Computers

BTO

Dimensions (W x D x H)
(with chassis ears/protrusions)

mm : 482.6 x 508 x 177
inches : 19 x 20 x 7

Bezel



Front View

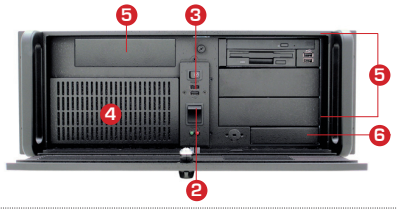

Top View

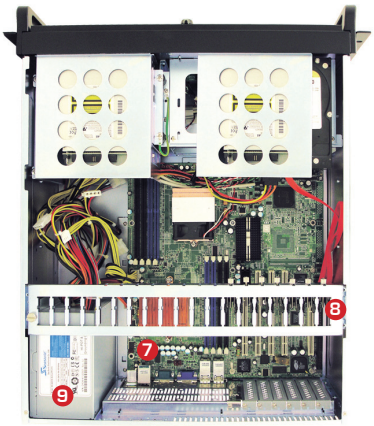

Rear View



Features & Benefits	
1	Front bezel with key lock for data security and protection [Available in Steel (standard) and Aluminum]
2	Power on/off, system reset and LEDs for Power and HDD
3	Front access dual USB ports
4	Removable & washable air filter for dust-free server interior Superior cooling through front air intake
5	Four(4) external 5.25” optical bays supported
6	One(1) external 3.5” optical bay supported
7	Two(2) internal 3.5” HDD supported (optional) (screwed under hold down bar)
8	Hold down bar to ensure that HBA cards are locked into positions
9	PS/2 size power supply
10	Two(2) rear fan slots for upgrade
11	Seven(7) PCI slots attribute to network expansion and scalability

SPECIFICATIONS

Industry Standard : EIA-RS310D		
Materials : Heavy-duty cold-rolled steel		
Finish :	Inside / Body : Zinc-plated with bright chromate	
	Outside / Front Panel : Texture-coated	
Cooling :	Front : 2 x 92mm fans (+ optional 2 x 60x25mm exhaust fans for updrade)	
Power Supply :	PS2	Standard PS/2 PSU
Expansion : MB Version: 7 x PCI slots (full height) BP Version: 14 x slots		
Controls : Power on/off, system reset and 2 x USB ports		
Indicators : Power and HDD LEDs		
System Board :	MB Version	Up to 12”(W) x 10.5”(D) ATX/SSI CEB compliant MB (Optional 12”(W) x 13”(D) E-ATX/SSI EEB 3.6 compliant MB)
	BP Version	(SBC) 14-slot

Drive Bay :	External	5.25”	4
		3.5”	1
		3.5” hot-swap	0
		2.5” hot-swap	0
	Internal	3.5” HDD	2 (optional)
		2.5” HDD	0
	Slim CD-Rom/DVD-Rom		0
	Slim FDD		0
Temperature : 0ºC(32ºF) ~ 50ºC(122ºF)			
Humidity : 5%~95% non-condensing			
Gross Weight : 18kgs / 39.6lbs (w/o PSU & Rail)			
Packaging Dimension (W x D x H) :		mm : 599 x 685 x 348	
Cubic Feet : 5.0			
Reference Container Loading :	20’	190	
	40’	390	
	40’ H	470	
Mounting Option :	SLR-20R (optional)	20” ball-bearing sliding rail for 427mm(W)	

Ordering Information

Part Number	Description
RMC-4C-0-2	4U entry w/o power supply, 4x5.25 + 1x3.5 bays

For complete replacement part numbers, please visit our website ***www.aicipc.com***

www.aicipc.com

Remark: All specifications and photos are subject to change without notice.

© 2011 Advanced Industrial Computer, Inc. All rights reserved.
Advanced Industrial Computer and Advanced Industrial Computer logo are trademarks used under license by Advanced Industrial Computer, Inc. All other trademarks are the property of their respective companies.